Halo

VEKA

Top Swing Window

The Top Swing Window can be suitable for locations where internal access to the outside face of the window is required for cleaning or maintenance.

U-Values with Triple Glazing as low as:
0.99 W/m2K

U-Values with Double Glazing as low as:
1.2 W/m2K

Available in a large assortment of colours and woodgrain options from the Variations range

Test Results

Window type: Top hung	
Max sash sizes (wxh)	1300mm x 1300mm
Air permeability	Class 3
Water tightness	Class E1050
Resistance to wind	2400
Exposure category	2000

Technical Drawing

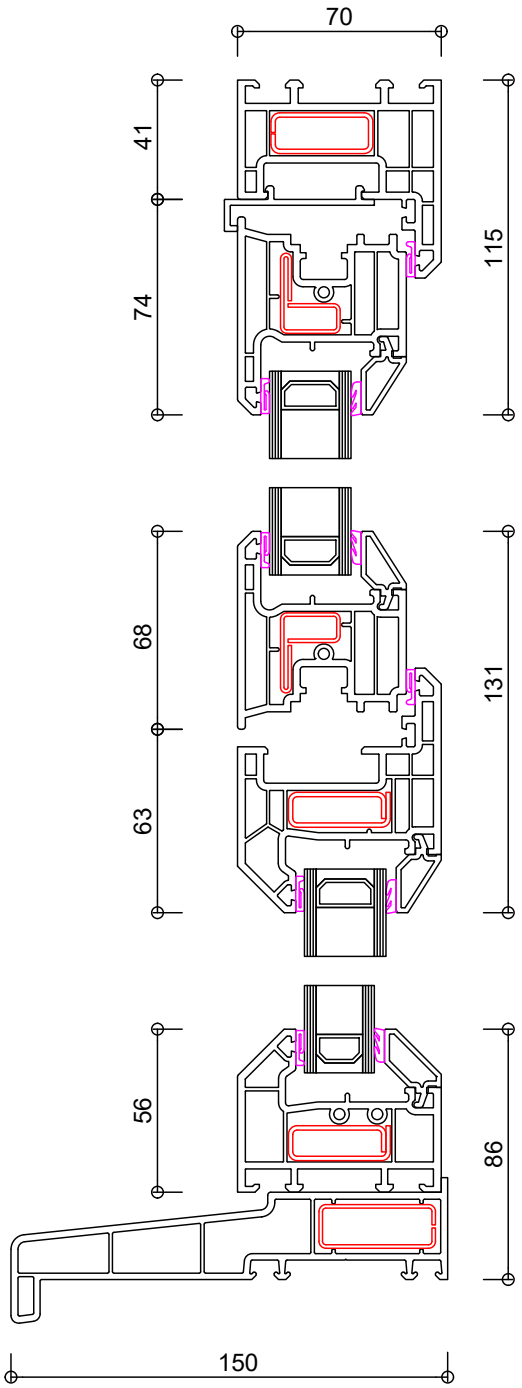

Features and Benefits

Safe 180° top-hung rotation

Top-hinged reversible action allows internal access to the external glass for cleaning, without projecting into the room space

Modern styling

Bevelled design to suit commercial and residential buildings.

Security & performance

Compatible with multi-point locking and can be specified to meet PAS 24 and Secured by Design requirements.

Multi-storey projects

Can be used for apartments and commercial buildings, with robust hardware and secure restricted opening options.

Maximum sash sizes
Top hung: 1300mm (w) x 1300mm (h)

Outer frames
68mm outer frame

Mullions
84mm or 100mm mullions

Sash
68mm reversible sash

Glazing beads

- 24mm sculptured
- 24mm bevelled
- 28mm sculptured
- 28mm bevelled
- 32mm sculptured
- 32mm bevelled
- 36mm bevelled
- 40mm bevelled

Ancillaries
Frame extensions, thermal inserts, cills and weathering trims
Range of coupling options
Range of bay pole options