


FlushSash Casement Window

VEKA FlushSash Casement Windows provide a flush casement appearance that can suit traditional property styles.

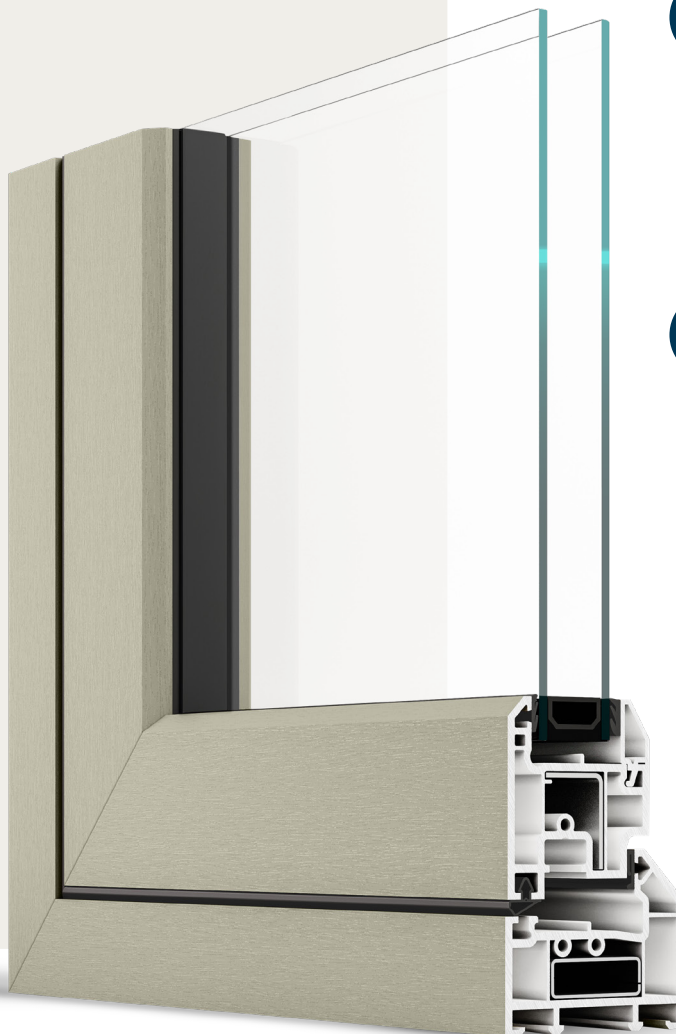

U-Values
with Triple
Glazing as low as:

0.95
W/m²K

U-Values
with Double
Glazing as low as:

1.2
W/m²K

Available in a large
assortment of colours
and woodgrain
options from
the Variations
range

Test Results

Window type: Side hung reinforced

Max sash sizes (wxh)	620mm x 1270mm
Air permeability	Class 4
Water tightness	Class 9A
Resistance to wind	A4
Exposure category	1600

Window type: Side hung


Max sash sizes (wxh)	846mm x 1746mm
Air permeability	Class 3
Water tightness	Class 7A
Resistance to wind	BE2400
Exposure category	2400

Window type: Top hung

Max sash sizes (wxh)	1380mm x 1380mm
Air permeability	Class 3
Water tightness	Class 7A
Resistance to wind	BE2400
Exposure category	2400



Technical Drawing

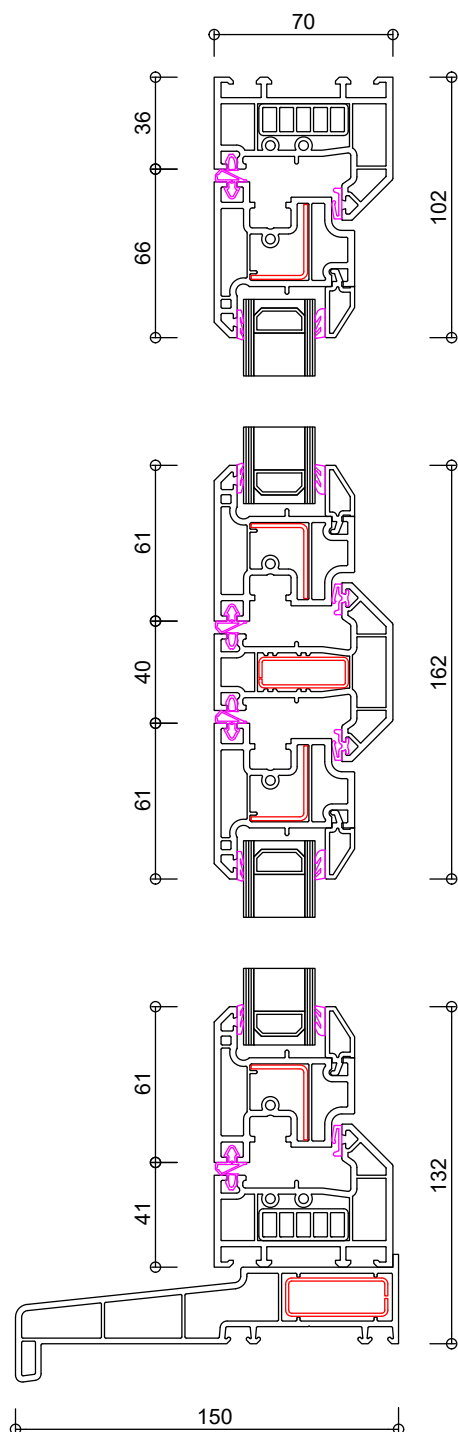

Features and Benefits



Crisp, bevelled appearance

Clean bevelled edges create a modern flush look, ideal for contemporary residential designs.



Minimalist flush finish

The sash sits level with the frame for a simple, symmetrical appearance from the outside.



Thermal performance

Multi-chambered profiles and the option for triple glazing support defined insulation and thermal performance values.



Flexible & practical design

Compatible with a wide range of VEKA ancillaries and easy to fabricate and install.

Maximum sash sizes

Side hung: 620mm (w) x 1270mm (h) / 846mm (w) x 1746mm (h)
Top hung: 1380mm (w) x 1380 (h)

Outer frames

56mm, 72mm and 84mm outer frames

Mullions

70mm mullion

Sash

61mm FlushSash

Glazing beads

- 28mm sculptured
- 28mm bevelled

Ancillaries

Frame extensions, thermal inserts, cills and weathering trims
Range of coupling options
Range of bay pole options