


VEKA

Fully Reversible Window

The VEKA Fully Reversible Window can be suitable for multi-storey properties, providing internal access to the external glass for cleaning and maintenance.

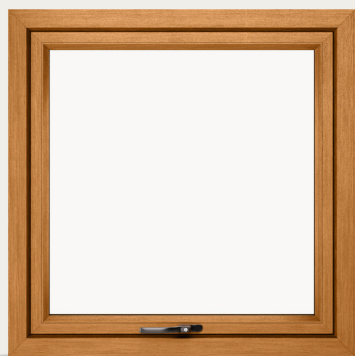

VEKA

U-Values
with Triple
Glazing as low as:

0.90
W/m²K

U-Values
with Double
Glazing as low as:

1.2
W/m²K



Available in a large
assortment of colours
and woodgrain
options from
the Variations
range

Test Results


Window type: Top hung

Max sash sizes (wxh)	1308mm x 1308mm
Air permeability	Class 2
Water tightness	Class E1050
Resistance to wind	AE2400
Exposure category	2000+





Technical Drawing

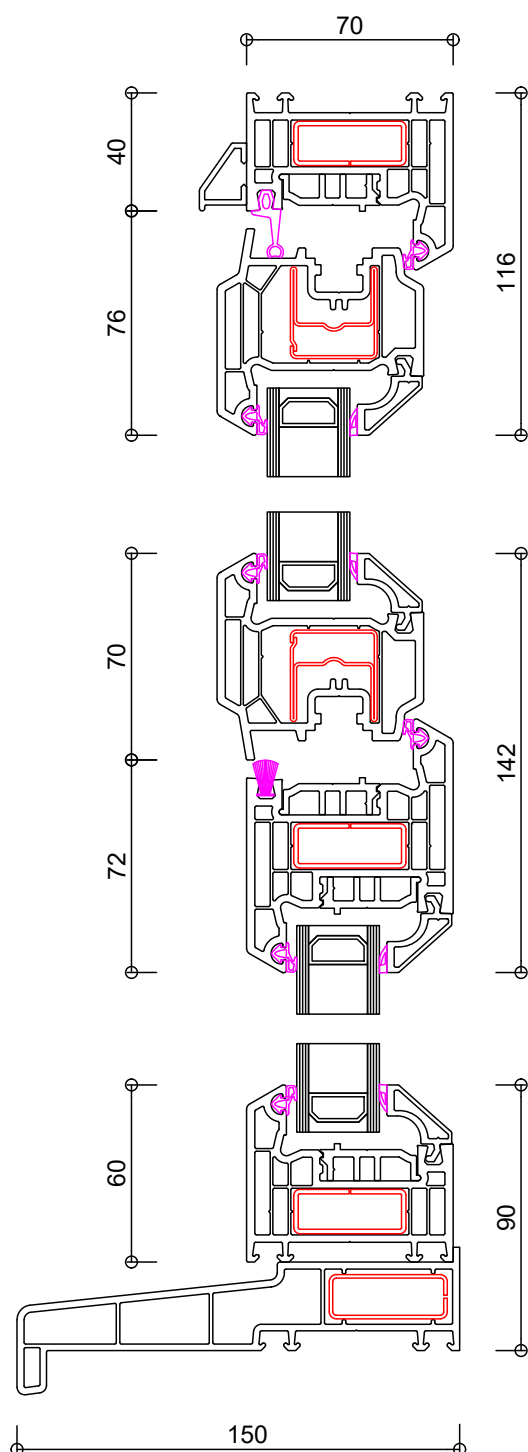

Features and Benefits



Full rotation for cleaning

The sash rotates 180° externally, allowing internal access to the outer pane for cleaning. This can be suitable for high-rise or hard-to-access locations



Slim, modern profile

Clean sightlines and a contemporary bevelled design make it visually suited for both residential and commercial projects.



Weather performance

Designed to support wind and water resistance in line with relevant standards, including use in more exposed environments.



Ventilation positions

Includes intermediate ventilation positions designed to provide controlled airflow while maintaining performance

Maximum sash sizes

Fully Reversible: 1400mm (w) x 1400mm (h)

Outer frames

60mm outer frame

Mullions

76mm T mullion

86mm T & Z mullions

Sash

70mm reversible sash

Glazing beads

- | | |
|-------------------|-------------------|
| • 28mm bevelled | • 40mm bevelled |
| • 28mm sculptured | • 40mm sculptured |
| • 36mm bevelled | • 44mm bevelled |
| • 36mm sculptured | |

Ancillaries

Frame extensions, cills and weathering trims

Range of coupling options

Range of bay pole options